



Advantage Flow Technologies

High Efficiency & Durability: Technology at your Service

FEATURES

- Solids handling capacity: up to a diameter of 2"(50.8 mm)
- Impeller: Semi-open double blade cast iron
- General manufacturing gray iron for durability
- 3" flush with female NPT thread type
- 2 HP motor with oil bath, 230 volt, 3 phases, 1750 RPM
- Consumption: 11 Full load amps
- Bearings on auto sized and lubricated for durability
- Cable Connection: SJTW 12AWG / 3C
- Maximum liquid temperature: 40 ° C (104 ° F)

APPLICATIONS

- Transfer, removal, effluent and sewage.
- Decanting of water in industry, construction and agricultural applications
- Drain pits, trenches and basements with sewage.
- Ideal for handling high flows.
- The best option for coffee processing processes due to its design and type of impeller.

WARRANTY

- 1 year subject to performance under conditions set out in the manual.




Submersible sewage pump RHG03-PWS9-M have hydraulic characteristics that make it ideal for transfer and movement of water in commercial, rural and industrial applications and any application pumping water with solid option. Suitable for continuous work, Made entirely of cast iron for durability and optimum performance, hydraulically has a suitable design for the transfer, transfer and washing of grains in agricultural applications based on their type of impeller and motor speed.



USA Technology



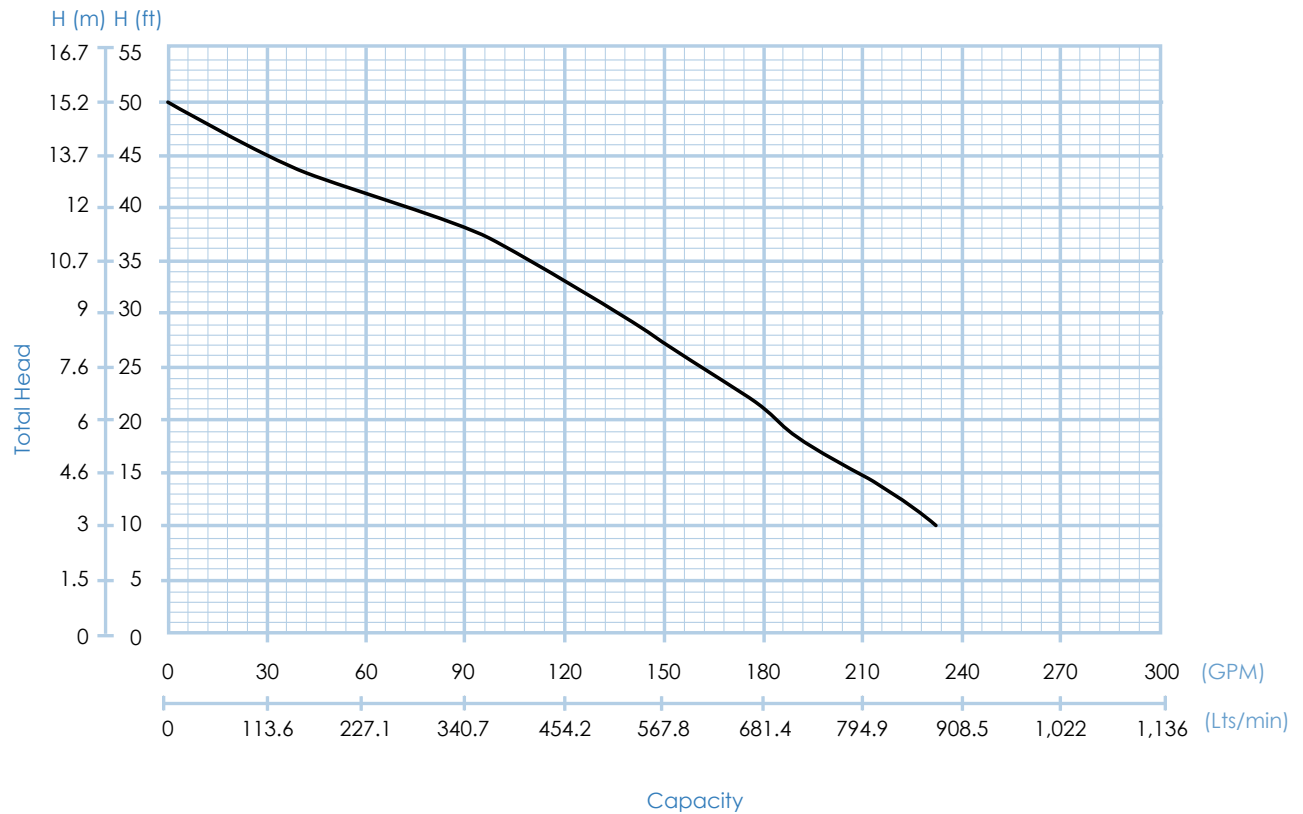

► CAPACITY

AFT Model	Stages	Motor (KW)	Motor (hp)	Voltage (V)	Phases	H (ft)	10	20	30	40	50
RHG03-PWS9-M	1	149	2	230	1	GPM	230	185	140	80	0
						LPM	871	700	530	303	0
						H m	3	6	9	12	15

► DIMENSIONS AND WEIGHT

AFT Model	Discharge	L1 (mm-pulg)	L2 (mm-pulg)	D1 (mm-pulg)	D2 (mm-pulg)	D3 (mm-pulg)	Weight (lb-kg)
RHG03-PWS9-M	3" NPT	563.8 - 22.2	177.8 - 7	403.3 - 15.88	294.6 - 11.6	139.9 - 5.51	83 - 37.7

